

## 300W-12V/24V LED Switching Power Supply(C&V)

- Protections: short circuit/over load/over voltage/over temperature
- Design for indoor installations
- Cooling by free air, high reliability
- 100% full load burn-in test
- Suitable for internal lights application for I / II / III.
- Widely used in LED lighting and IT equipment
- Compliance to worldwide safety regulation for led lightings.



Type Approved  
Safety  
Regular Production  
Surveillance  
www.tuv.com  
ID 1111227254



R-41123510  
www.bis.gov.in



CE

CB

SELV

IP20




### Specification

Model		YSD-300WHC-12	YSD-300WHC-24
OUTPUT	Output voltage	12VDC	24VDC
	Output voltage range	12VDC $\pm$ 0.5VDC	24VDC $\pm$ 0.5VDC
	Output current	Max 25A	Max 12.5A
	Output power	Max 300W	
	Output power range	0~300W	
	Ripple & Noise	$\leq$ 120mV	$\leq$ 240mV
	Linear Regulation	$\pm$ 1%	
	Load Regulation	$\pm$ 1%	
	Start-up Time (Typ)	650ms/230VAC 800ms/115VAC	
	Hold Up Time(Typ)	500ms/230VAC 500ms/115VAC	
INPUT	Input voltage	175-264Vac or 100-130Vac	
	Frequency	50/60Hz	
	Input current	2.6A/230Vac or 4.7A/115Vac	
	Power factor	PF $>$ 0.6	
	No-load power consumption	$<$ 4W	
	Efficiency (typ.)	86%	88%
	Inrush current(typ.)	Cold start 60A at 230Vac	
	Control surge capability	L,N:2KV L,N-PE:4KV	
	Leakage current	Max. 0.5mA	
ENVIRONMENT	Working temperature	ta: -30°C~ 50°C tc: 80°C	
	Working humidity	20 ~ 99%RH, non-condensing	
	Storage temp., humidity	-40°C ~ 80°C, 10~95%RH	
PROTECTION	Overtemperature	Protection type: Turn off the output voltage, after the temperature drops, re-energize to restore.	
	Over load protection	Shut down the output when current load $\geq$ 110%~150%, auto recovers.	
	Short circuit protection	Protection type: It can be automatically restored after the fault is eliminated.	
SAFETY & EMC	Withstand voltage	I/P-O/P:3750Vac	
	Isolation resistance	I/P-O/P: 100M $\Omega$ /500VDC/25°C/70%RH	
	Safety standards	IEC/EN61347;IEC/EN60950;IP20	
	EMC Test Standards	EN55015: 2013;EN61547: 2009; EN61000-3-2:2014; EN61000-3-3:2013	
Reliability and Quality Control	Impact aging	100% of the product is fully loaded and impacted for 4 hours under an environment of at least 40°C $\pm$ 5°C	
	Component derating	Under the steady-state conditions of rated input and output, the stress of components will not exceed its maximum nominal value	
NOTE		1. All parameters not specifically mentioned are measured at 230VAC input, rated load and 25°C ambient temperature. 2. Ripple and noise test method: connect 0.1 $\mu$ F and 47 $\mu$ F capacitors in parallel at the terminal, and measure under 20MHZ bandwidth. 3. Ensure that the power supply is used under the rated parameters and environment.	


### Dimensions

Unit:mm

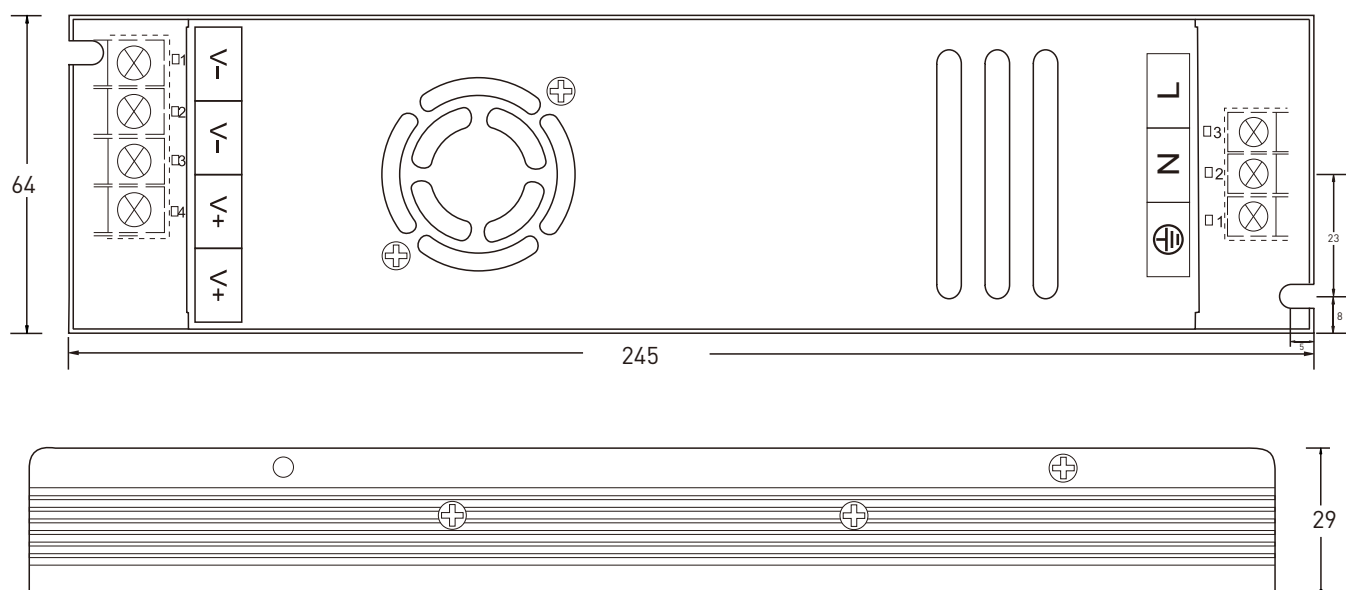


### Relationship diagrams

Efficiency vs Load

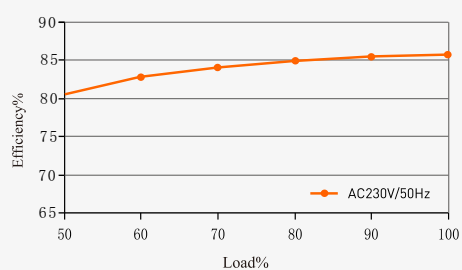

YSD-300WHC-12

Efficiency vs Load

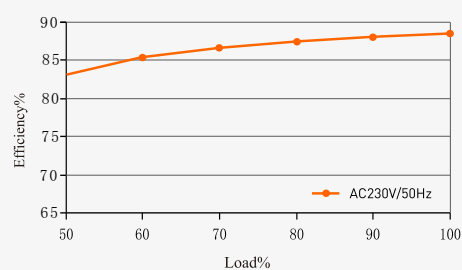

YSD-300WHC-24

### Packaging Information

DIMENSION	245x64x29mm(LxWxH)
PACKING	250x67x33mm(LxWxH)
CARTON QUANTITY	40PCS
CARTON SIZE	360x260x295mm(LxWxH)
WEIGHT	385g±10g/PCS

### Temperature load curve

