


LED ultra-thin high PFC power supply Q&V

- Universal AC input/full range(100-264VAC)
- Built in active PFC function
- Efficiency up to 94%, super thin and small size.
- Protections:short circuit/over load/over voltage/over temperature
- Can withstand 300VAC surge input for 5S
- 150% peak load capacity (100ms)
- Fanless design,Cooling by free air, high reliability
- Suitable for internal lights application for I / II / III.
- Widely used in LED lighting and IT equipment
- Compliance to worldwide safety regulation for led lightings.




Type Approved
Safety
Regular Production
Surveillance
www.tuv.com
ID: 1111227354

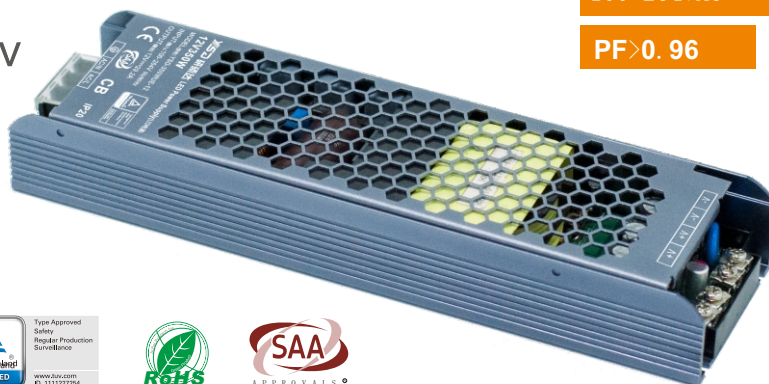


Specification


Model		YSD-350WUE-12	YSD-350WUE-24	YSD-350WUE-36	YSD-350WUE-48
OUTPUT	Output voltage	12VDC	24VDC	36VDC	48VDC
	Output voltage range	12VDC±0. 3VDC	24VDC±0. 6VDC	36VDC±0. 9VDC	48VDC±1. 2VDC
	Output current	Max 29.2A	Max 14.6A	Max 9.8A	Max 7.3A
	Output power	Max 350W			
	Output power range	0~350W			
	Ripple & Noise	≤240mV	≤240mV	≤360mV	≤360mV
	Linear Regulation	±0.5%			
	Load Regulation	±0.5%			
	Start-up Time (Typ)	400ms/230VAC 800ms/115VAC			
	Rise Time(Typ)	11ms/230VAC 11ms/115VAC			
	Hold Up Time(Typ)	10ms/230VAC 10ms/115VAC			
INPUT	Input voltage	100-264Vac			
	Frequency	50/60Hz			
	Input current	39~1.43A			
	Power factor	PF>0.96/230Vac, at full load PF>0.98/115Vac, at full load			
	No-load power consumption	<2W			
	THD	≤10% at 230Vac,at full load			
	Efficiency (typ.)	94%	945%	94. 8%	95%
	Inrush current(typ.)	Cold start: 60A/230V			
	Control surge capability	L,N-PE:4KV			
	Leakage current	Max. 0.5mA			
ENVIRONMENT	Working temperature	ta: -30℃ ~ 50℃ tc: 80℃			
	Working humidity	20 ~ 99%RH, NON-condensing			
	Storage temp., humidity	-40℃ ~ 80℃, 10~95%RH			
	Vibration	10~500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes.			
PROTECTION	Overtemperature	Protection type: Turn off the output voltage, after the temperature drops, re-energize to restore.			
	Over voltage protection	Output voltage ≥42-50V, turn off the output, after the abnormality is eliminated, re-energize to recover.		Output voltage ≥56-66V, turn off the output, after the abnormality is eliminated, re-energize to recover	
	Over load protection	Shut down the output when current load ≥110%~150 %, auto recovers.			
	Short circuit protection	Protection type: It can be automatically restored after the fault is eliminated.			
SAFETY & EMC	Withstand voltage	I/P-O/P: 3750Vac			
	Isolation resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH			
	Safety standards	IEC/EN61347 ; IEC/EN60950 ; IP20			
	EMC emission	EN55015:2013 ; EN61547:2009 : EN61000-3-2:2014 ; EN61000-3-3:2013			
	EMC immunity	EN61000-4-2,3,4,5,6,8,11 EN61547			
NOTE	1. All parameters not specifically mentioned are measured at 230VAC input, rated load and 25° C ambient temperature. 2. Use 12 twisted-pair wires terminated with 0.1uF and 47uF parallel capacitors to measure ripple and noise under a 20MHz bandwidth. 3. Tolerance: including setting tolerance, wire gauge and wire gauge. 4. Ensure that the power supply is used under the rated parameters and environment				

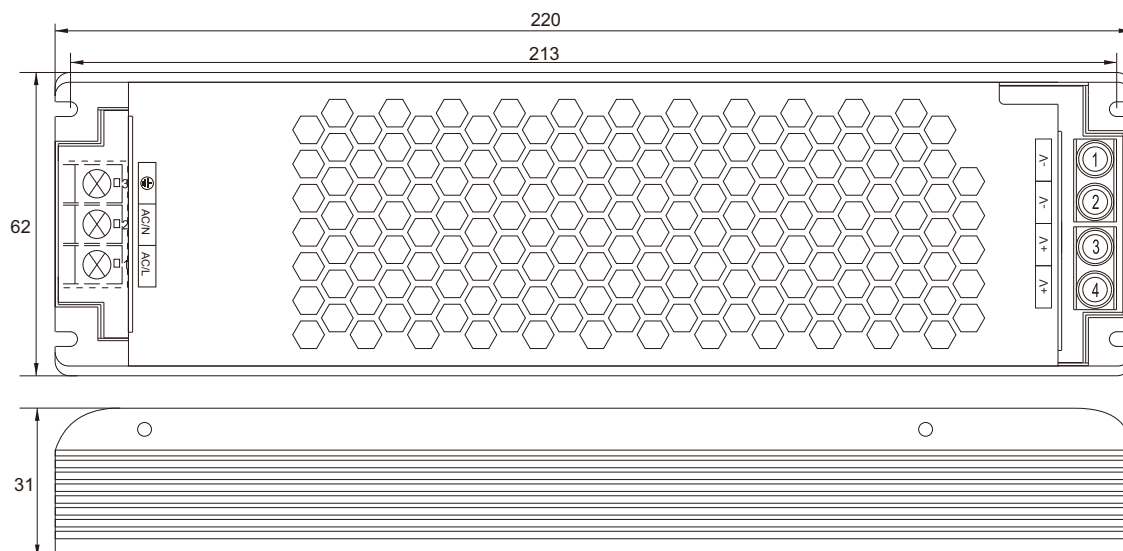


Relationship diagrams

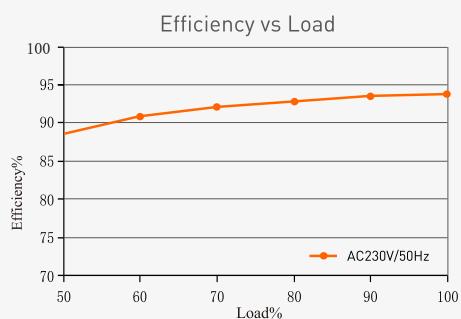


YSD-350WUE-12

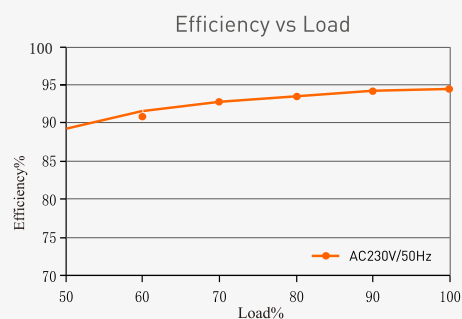

YSD-350WUE-24

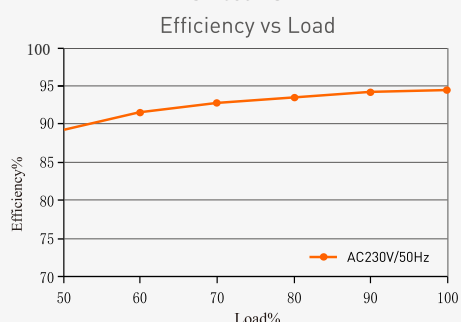

YSD-350WUE-36

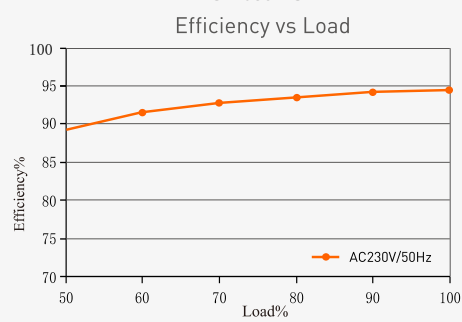

YSD-350WUE-48

Packaging Information

DIMENSION	220x62x31mm(LxWxH)
PACKING	223.5x64x35mm(LxWxH)
CARTON QUANTITY	
CARTON SIZE	
WEIGHT	635g±10g/PCS

Temperature load curve

